

LED Push Button SWL-LPB

Specification

When the pedestrian pushes the button, the pre-warning system starts.

Material: Aluminum housing with stainless steel accessories

Protection Level: IP65

Operating Temperature: -4°F to +176°F

- The pattern of pilot light can be customizable.
- A small pilot light is installed integral to the push button to give confirmation that the system is in operation.(Conform to the MUTCD IA-21)

Specification-Electrical

Power Supply: DC 12V

Standby Power Consumption: 0.06W


Max Power Consumption: 2W

Standby Current Consumption: 5mA

Max Current Consumption: 170mA



Structure Diagram

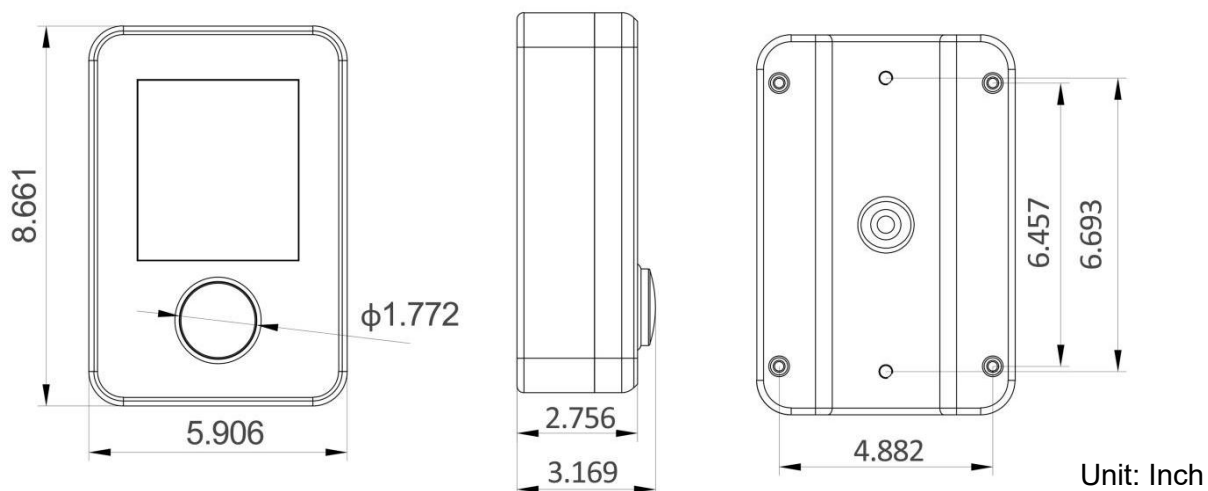

AMERICAN COMBAT VETERAN OWNED COMPANY



405-673-8684

www.gridshiftsolar.lighting

GRIDSHIFT™
SOLAR LIGHTING

Corporate: 2803 Broadway Ct. Edmond, OK 73013
California: 1341 Distribution Way, Suite 20, Vista, CA 92081

SolaRight is a trademark of GridShift Solutions, LLP



Wounded Warrior Project