

# SIEGE SOLAR AREA LIGHT: 21" x 24" CS-SIE-2124-(10W-15W-20W)

#### Specification Highlights

- MADE IN USA
- 21" x 24" solar panel-51 Watt monocrystalline
- 36 AH 12.8V Lithium Iron Phosphate Battery
- Philips Lumileds 5050 LED
- 5 Year Standard Warranty
- **Burn Time Certified**
- Core Restore battery recycling included
- Wildlife/Turtle friendly amber CCT available

#### All in One Design

- Solar panel, battery & controller in one attractive luminaire
- No visible solar panel or battery box
- Low EPA for less strain on pole and lower install costs
- Easy retro-fit to existing poles





OPTIONS Motion Sensor & Light Shield





**Exclusive Free Battery Recycling** Program

Available with:




### 5G Remote Access

- Monitor
- **Set Timing**
- **Get Alerts**







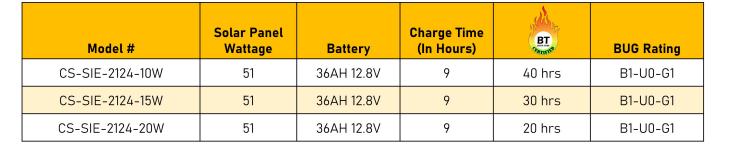



Monocrystalline Solar Module



Self Learning Controller



LiFeP04 Lithium-Iron Battery



Philips Lumileds Luxeon 5050 Chip



All-in-One




Optional Motion Sensor



### AMERICAN COMBAT VETERAN OWNED COMPANY

405-673-8684 www.gridshiftsolar.lighting


Corporate: 2803 Broadway Ct. Edmond, OK 73013 California: 1341 Distribution Way, Suite 20, Vista, CA 92081







Wounded Warrior Project




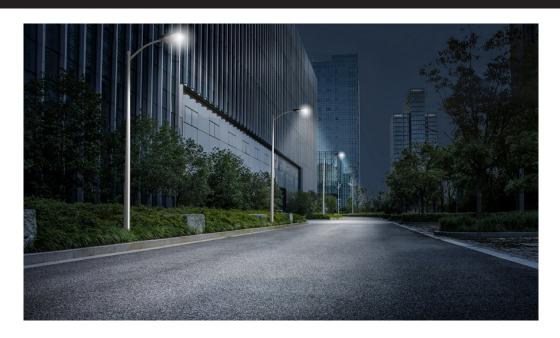


### **Photometrics**










<sup>\*</sup>Please note, for pattern reference only. Model shown is 30W at 20' mounted height. Email for current IES files.





405-673-8684 www.gridshiftsolar.lighting










# SIEGE SOLAR AREA LIGHT: 21" x 24" CS-SIE-2124-(10W-15W-20W)




CS-SIE-2124-1







CS-SIE-2124-3



Comes with external SS mounting bracket



Comes with internal mounting system with 2.5" dia. x 7" deep



Comes with 2.5" OD X 3" tall Post Top Mounting Provision that fits 2.375" O.D. X 3" tall Tenon

EPA: .73

EPA: .4 Weight: 21lbs EPA: .48

opening

#### \*Custom mounting systems available upon request. Consult with factory for details.

Model #	Watts	Lumens	Available Optic Types	Color Temp in 100K	Fixture Profile Codes	Mounting Bracket Option (See Bracket Codes)	Color (BLK-Black/BRZ- Bronze/GRY-Grey/CUST- Custom	Optional 5G Remote Access (Yes/No)	Style (see above)
Cuesta Sol CS-SIE-2124	10	1800	11/111/1V/V	30K / 40K / 50K / 57K/ 65K	(See Profile Codes)	MB-1 / MB-2 / MB-3	BLK / BRZ / GRY / CUS	Y/N	1/2/3
Cuesta Sol CS-SIE-2124	15	2700	11/111/1V/V	30K / 40K / 50K / 57K/ 65K	(See Profile Codes)	MB-1 / MB-2 / MB-3	BLK / BRZ / GRY / CUS	Y/N	1/2/3
Cuesta Sol CS-SIE-2124	20	3600	11/111/1V/V	30K / 40K / 50K / 57K/ 65K	(See Profile Codes)	MB-1 / MB-2 / MB-3	BLK / BRZ / GRY / CUS	Y/N	1/2/3

Ordering Description Ex	kample								
Cuesta Sol CS-SIE-2124	10	1800	III	30K	А	MB-1	BLK	Υ	1


Ordering Descript	Ordering Description					
Cuesta Sol CS-SIE-2124	10	1800				
Cuesta Sol CS-SIE-2124	15	2700				
Cuesta Sol CS-SIE-2124	20	3600				



### Standard Profile

- a. On at dusk 100% to dawn.
- b. SMART controller prevents "dark" nights
- by adjusting to use available power.








## AMERICAN COMBAT VETERAN OWNED COMPANY

405-673-8684 www.gridshiftsolar.lighting







# Solar Panel



### High Efficiency Mono-Crystalline Module

18.5% photoelectric Conversion Efficiency
Ending with 85% output in 20 years
3.2mm tempered glass lamination for excellent mechanical load resistance.

# Lithium Iron Battery



### Lithium Iron Phosphate Battery (LiFe P04)

This integrated solar street lamp series uses highefficiency lithium iron phosphate battery, high temperature performance, high current discharge, and has a cycle life of more than 2000 times.

# Led Chip



# Philips Lumileds Luxeon 5050 Chip

By using the Philips luxeon LED chips, our single lumen value is 180Lm/w. It has excellent heat dissipation and maintains high levels of brightness with little fading. The sealed lenses are made with strong UV protected PC and have anti-aging and shock resistant values. The well optimized light distribution makes for a uniform photometric footprint.

## **Burn Time**



### **Burn Time Certification**

Burn Time Testing works in conjunction with ASTM standards to evaluate and validate the solar luminaire's performance in a controlled environment based on your required lighting profile. This testing also equalizes the environment, tests the products performance, and provides reliable results that can be compared without subjectivity. Burn Time Testing ensures that the product being considered has undergone stringent, objective, 3rd party testing



### AMERICAN COMBAT VETERAN OWNED COMPANY

405-673-8684 www.gridshiftsolar.lighting



