


Project:
Quantity:
Notes:
Type

### General

Warranty	2 Year Full Replacement
Lens Construction	Polymethyl Methacrylate
Housing	Aluminum
Water Proof Rating	IP68
Dimensions	Ø 4.92" x 4.21" x 1.02"
Load Capacity	30T

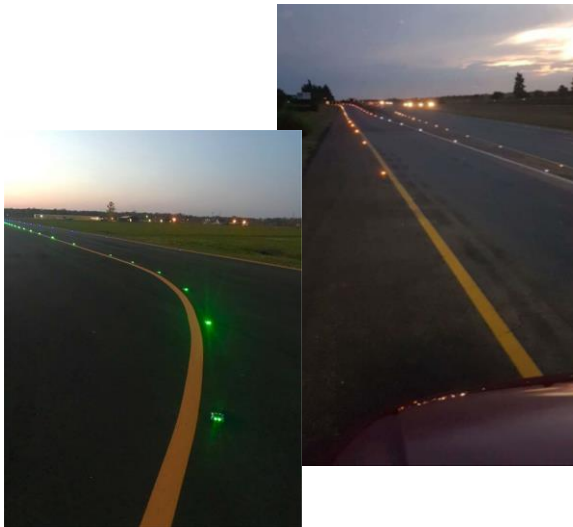

	Solar Module Size	2.29" x 1.93"
	Solar Maximum Output Power	0.375W
	Solar Operating Current	150mA
	Solar Voltage	2.5V
	LED Size	Ø5 LED
	LED Current	20mA per each
	LED Operating Current	150mA
	LED Voltage	3V, 2V
	LED Quantities	4 pcs / 6 pcs
	NI-MH Battery	2.5V/150mA
	Lithium Battery	5V/60mA

### Performance

	Operating Time	Life Span
NI-MH Battery	Flashing – 140 Hours Steady – 40 Hours	2 Years
Lithium Battery	Flashing – 300 Hours Steady – 72 Hours	5 Years

### How to specify:

Model	Function	Color	Power Source	Case Color
SWL-RRM	S-Steady F-Flash C-Chase Flashing SYNC-Synchronized Flashing	R-Red G-Green B-Blue Y-Yellow W-White	N – NI-MH Battery L – Lithium Battery	D - Default (White) M - Match to LED Color

### Example: SWL-RRM-SW-N

SWL-RRM, Steady, White, with NI-MH battery  
(For Bi-Directional, specify 2 colors. I.e. Red/White =RW)



AMERICAN COMBAT VETERAN OWNED COMPANY



405-673-8684

[www.gridshiftsolar.lighting](http://www.gridshiftsolar.lighting)

