
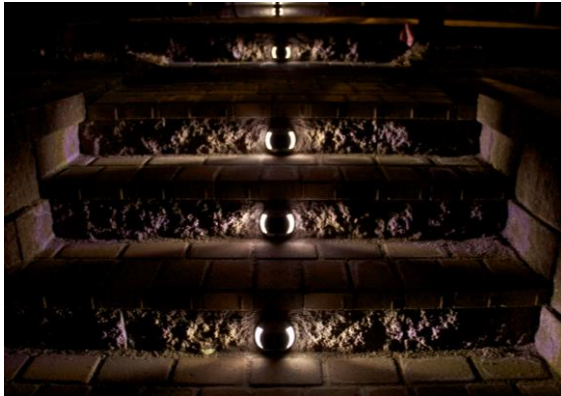


Project:
Quantity:
Notes:
Type:

Performance

Charge Time	3 hrs/8 hrs Cloudy
Operating Time	16+ Hours
Cycles (Days)	100,000
Expected Life	10+ yrs

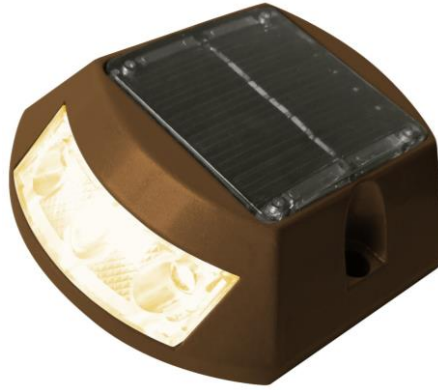

	Solar Module Size	40 x 53mm
	Solar Maximum Output Power	0.337W
	Solar Operating Current	107mA
	Solar Voltage	3.15V
	LED Size	3258 Chip LED + 10Ø Lens
	LED Current	20mA per each
	LED Operating Current	1.1mA per each
	LED Voltage	3V
	LED Wattage	0.019W
	LED Quantities	6 pcs
	Pseudocapacitor	2.3V 120F
	Number of Semicapacitors	2 pcs


General

Lens Construction	UV Polycarbonate
Housing	Powder Coated Aluminum
Operating Temperature	-40°F to 158°F
Dimensions (in)	4.33"L x 3.54"W x 1.18"H
Weight (lbs)	0.86#
Color Temperature	3000K Warm White

Certification

Test Method

	EN 55015:2000+A1:2001+A2:2002 EN 61547:1995+A1:2000
Compressive Load: 63,635 lbf	ASTM C 67:06
	IEC 60529:2001

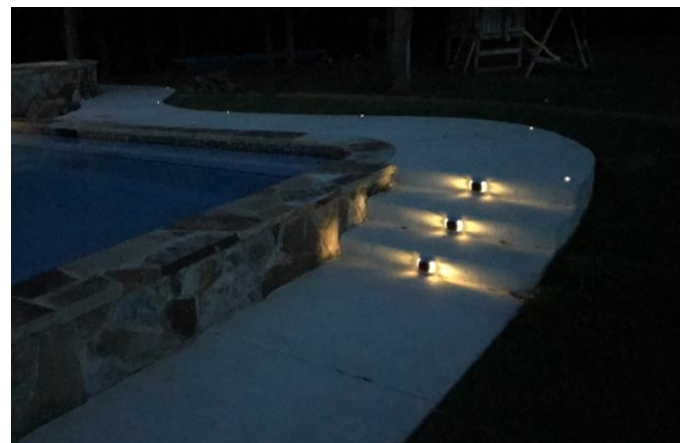

AMERICAN COMBAT VETERAN OWNED COMPANY



405-673-8684

www.gridshiftsolar.lighting

